




B.N.C.TOOLING Co.,Ltd.

BNCTOOLING.COM
BNCTOOLINGSHOP.COM

69/90 Hatairat Rd., Minburi ,Minburi Bangkok (Thailand) 10510




Tension Meter

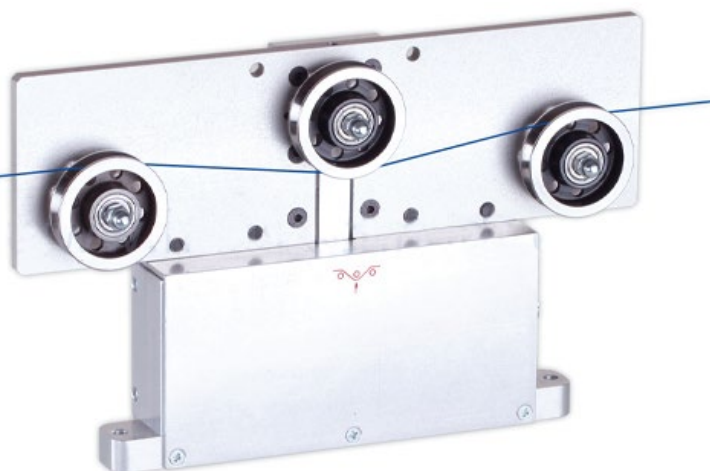

7 Tension ranges available
from 0 - 1000 cN up to 0 - 100.00 daN

Tension Meter MZH

Dimensions

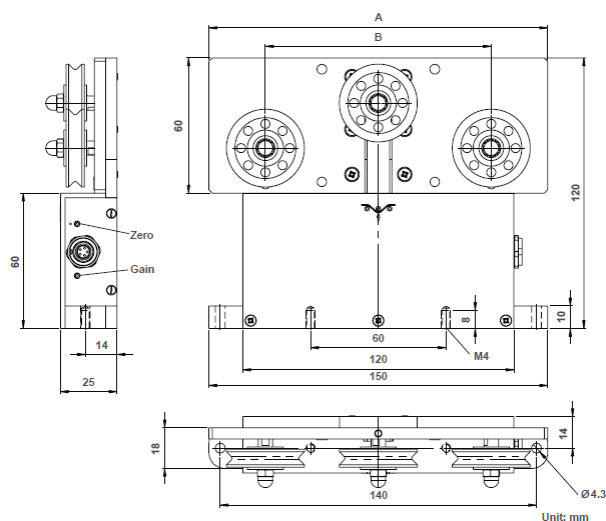

Model	A	B
MZH-1000	150	100
MZH-2000	150	100
MZH-5000	200	150
MZH-10K	200	150
MZH-20K	250	200
MZH-50K	250	200
MZH-100k	250	200

Specifications

Calibration:	According to SCHMIDT factory procedure
Accuracy:	±1.5 % full scale and ±1 digit % full scale or better other calibration material ±3 % full scale or better
Overload protection:	100 % of tension range
Measuring principle:	Strain gauge bridge
Measuring roller deflection:	Max. 0.5 mm
Natural frequency:	Approx. 500 Hz, depending on tension range
Signal processing:	Analog (Option: digital)
Temperature drift:	Less than ±0.05 % full scale/°C
Output signal:	Standard: 0 – 1 V DC (analog) impedance: ≥ 5 kΩ Option: 0 – 10 V DC (analog), 4 – 20 mA DC (current)
Option digital:	USB, RS-232 or RS-422
Damping (fg):	Standard: 30 Hz (other values on request)
Temperature range:	10 – 45 °C
Air humidity:	85 % RH, max.
Power supply:	+15...24 V DC, max. 21 mA (standard output)
Code A3:	50 mA, Code 422: 50 mA, Code 232: 40 mA
Housing material:	Aluminium
Dimensions:	See dimensions
Weight, net (gross):	Up to model MZH-2000 approx. 560 g (approx. 700 g)
	Model MZH-5000 and MZH-10K approx. 600 g (approx. 750 g)
	Model MZH-20K and higher approx. 640 g (approx. 800 g)

**Special Features**

- Small, compact housing
- Tension sensor MZH with integrated measuring amplifier and high accuracy of 1.5 % FS
- Typical material path – warping the 3 rollers
- Ball-bearing mounted guide rollers,
 - V-grooved (for material with max. 4 mm Ø)
 - U-grooved (for material with 3 up to 15 mm Ø)
 - tape grooved (for material with max. width of 10 mm)
- Various output signals are available:
 - analog: 0 – 1 V DC (standard), 0 – 10 V DC (optional)
 - digital (optional): USB, RS-232, RS-422 – see model MZH-422
 - current: 4 – 20 mA (optional)
- Universal mounting possibility – easy to install, even afterwards, on existing machines:
- The sensor can be mounted using the two threads at the underside of the housing body. Alternative it can be fixed on two flanges on the side of the unit.
- Easy calibration to customized material by operator – zero and gain calibration is required
- Measuring principle – load cell with high quality strain gauge bridge

Standard Features

- V-grooved guide rollers, ball-bearing mounted
- Required power supply +15...24 V DC (regulated)
- Certificate of Compliance with the order 2.1 according EN 10204 is included
- Optionally available: Inspection Certificate 3.1 according EN 10204 with calibration report

Available Models

Model	Tension Range	Measuring Head Width*	SCHMIDT Calibration Material**
MZH-1000	0 – 1000 cN	120mm	PA: 0.30 mm Ø
MZH-2000	0 – 2000 cN	120mm	PA: 0.50 mm Ø
MZH-5000	0 – 5000 cN	120mm	PA: 0.80 mm Ø
MZH-10K	0 – 10 daN	120mm	PA: 1.00 mm Ø
MZH-20K	0 – 20 daN	120mm	PA: 1.50 mm Ø
MZH-50K	0 – 50 daN	120mm	Steel rope 1.50 mm Ø(7x7x0.20)
MZH-100K	0 – 100 daN	120mm	Steel rope 3.00 mm Ø(6x7x0.30)