




B.N.C.TOOLING Co.,Ltd.

BNCTOOLING.COM
BNCTOOLINGSHOP.COM



HELIOS • PREISSER

0236 Workshop calipers with long measuring jaws

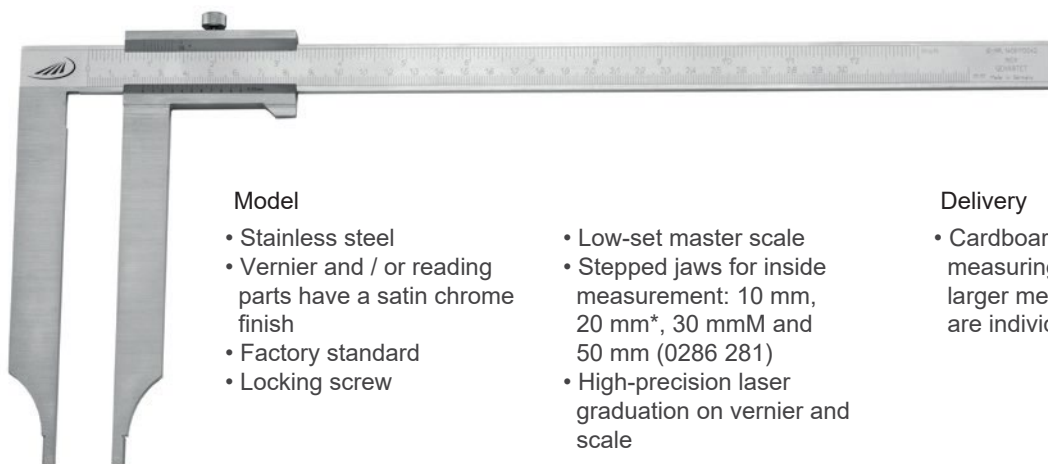

Model

- Stainless steel
- Vernier and / or reading parts have a satin chrome finish
- Factory standard
- Locking screw

- Low-set master scale
- Stepped jaws for inside measurement: 10 mm, 20 mm*, 30 mmM and 50 mm (0286 281)
- High-precision laser graduation on vernier and scale

Delivery

- Cardboard box up to measuring range 1000 mm, larger measuring ranges are individually packed

✕		Measuring range		Jaw length		Reading		Error limit	Order no.
		mm	inch	mm	inch	mm	inch	mm	
Vernier satin chrome finished									
		0-300	12	150	6.0	0.05	1/128	0.1	0236 204
		0-400	16	150	5.0	0.05		0.1	0236 206*
		0-400	16	200	8.0	0.05		0.12	0236 207
		0-500	20	200	8.0	0.05		0.14	0236 209*
		0-500	20	250	10.0	0.05		0.14	0236 210*
		0-600	24	200	8.0	0.05		0.16	0236 212*
		0-600	24	300	12.0	0.05		0.16	0236 213*
		0-800	31	200	8.0	0.05		0.2	0236 215*
		0-800	31	300	12.0	0.05		0.2	0236 216*
		0-800	31	400	16.0	0.05		0.2	0236 217*
		0-1000	39	200	8.0	0.05		0.24	0236 219*
		0-1000	39	300	12.0	0.05		0.24	0236 220*
		0-1000	39	500	20.0	0.05		0.24	0236 221*
•		0-1500	59	300	12.0	0.05		0.36	0236 225*
•		0-2000	79	300	12.0	0.05		0.44	0236 227*
•		0-3000	118	300	12.0	0.05		0.64	0236 231
Vernier + scale satin chrome finished									
		0-300	12	150	6.0	0.05	1/128	0.1	0236 504
		0-400	16	150	5.0	0.05		0.1	0236 506*
		0-400	16	200	8.0	0.05		0.12	0236 507*
		0-500	20	200	8.0	0.05		0.14	0236 509
		0-500	20	250	10.0	0.05		0.14	0236 510*
		0-600	24	200	8.0	0.05		0.16	0236 512*
		0-600	24	300	12.0	0.05		0.16	0236 513*
		0-800	31	200	8.0	0.05		0.2	0236 515*
		0-800	31	300	12.0	0.05		0.2	0236 516*
		0-800	31	400	16.0	0.05		0.2	0236 517*
		0-1000	39	200	8.0	0.05		0.24	0236 519*
		0-1000	39	300	12.0	0.05		0.24	0236 520*
		0-1000	39	500	20.0	0.05		0.24	0236 521*
•		0-1500	59	300	12.0	0.05		0.36	0236 525*
•		0-2000	79	300	12.0	0.05		0.44	0236 527*

☞ Marked * = excess length/excess weight

✕ Marked * = includes a F.O.C. calibration certificate, traceable to national standards