



LOW COST REACTIVE TYPE VIBRATION TESTER VS-5060L

ISO 9001:2015 / CNS 12681



- The PC control program able to show vibration displacement, acceleration, frequency and test time immediately.
- Capable of printing test report and providing unlimited data saving space.
- Signal generation include fixed frequency, sweep frequency, multi-random test function.
- Tester with wheels for easy installation and movement.
- With excellent spring vibration isolator.



SIMPL REACTIVE TYPE VIBRATION TESTER

ISO 9001:2015 / CNS 12681

VS-5060LS



- Vibration generation based on advanced reactive principle theory.
- PC controller expansion available and easy operation.
- Tester with wheels for easy installation and movement.
- Test function: fixed frequency, be able to set frequency and time freely. (optional option: sweep frequency)
- With excellent spring vibration isolator.





REACTIVE TYPE VIBRATION TESTER SPECIFICATION

Product Description

MODEL	VS-5060M-H	VS-5060M	VS-5060L	VS-5060LS
TableSize mm	500*600	500*600	500*600	500*600
Vibration Direction	Vertical + Horizontal	Vertical	Vertical	Vertical
Frequency Range Hz	5-100Hz (Vertical) 5-60Hz (Horizontal)	5-100	5-100	5-100
Frequency Accuracy Hz	+0.05Hz	+0.05Hz	+0.1Hz	+1Hz
Displacement Range (p-p) mm	0 - 2.8mm	0 - 2.8m	0 - 2.8m	0 - 2.8mm
AccelerationRange G	0-14G	0-14G	0-14G	0-14G
Max. Payload KG	150KG (Vertical) 400KG (Horizontal)	150	150	150
Test Mode	Fixed Sweep Multi-Random	Fixed Sweep Multi-Random	Fixed Sweep Multi-Random	Fixed Sweep
Display	PC - English Mandarin	PC - English Mandarin	PC - English Mandarin	LED Display




(Large Table)




(ESS)






(On Line Fixture)

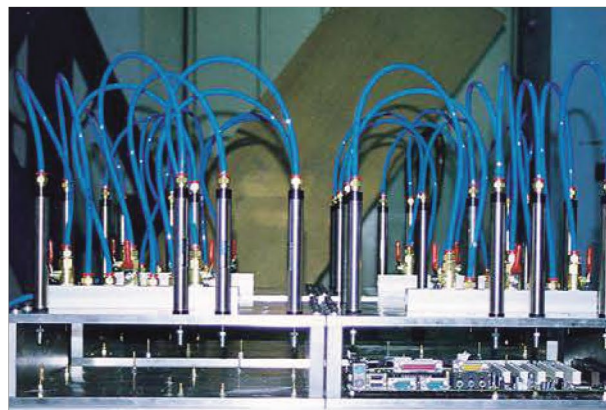



WINDOWS VERSION CONTROL PROGRAM PICTURES

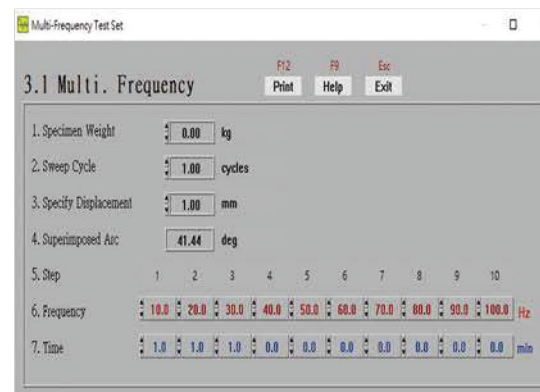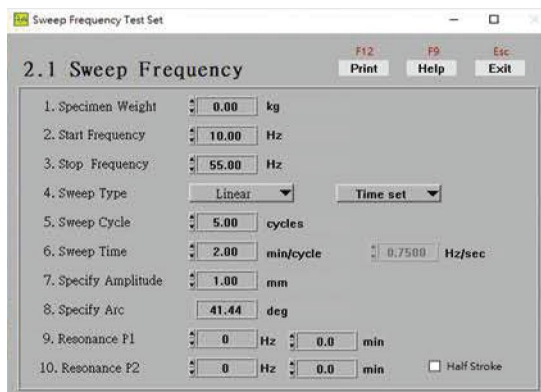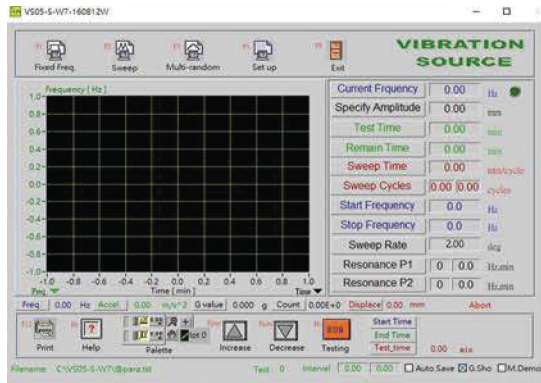

THE CAPACITY CHARACTERISTIC DIAGRAM OF TESTER

