


## Thickness Gauge NOVOTEST UT-1M-IP

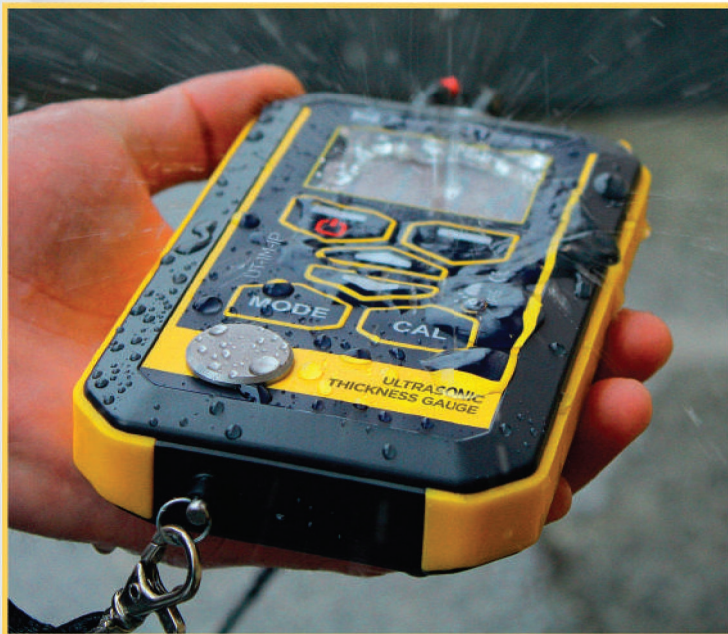

Unique protection against dust and moisture, previously not available in the market. By default the device comes with a degree of dust-moisture protection IP65. The device can be supplied with reinforced protection up to IP67 (submerged in water).

Unprecedented autonomy of the device - the time of continuous operation of the thickness gauge increased to 200 hours.

Special rubber lining on the side surfaces of the casing facilitates the convenient retention of the thickness gauge in the operator's hand.

Light weight and small dimensions, in comparison with similar protected thickness gauges.



Thickness gauges can be equipped with different ultrasonic testing probes: 2,5 MHz, 5 MHz, 10 MHz and various calibration blocks.



**B.N.C.TOOLING Co.,Ltd.**

[BNCTOOLING.COM](http://BNCTOOLING.COM)  
[BNCTOOLINGSHOP.COM](http://BNCTOOLINGSHOP.COM)

☎ 02-918-8020  
02-918-8021(Fax.)

✉ [bnctooling@hotmail.com](mailto:bnctooling@hotmail.com) / [sales@bnctooling.com](mailto:sales@bnctooling.com)

☎ 089-788-5199  
084-8744-883



**NOVOTEST**