


0735 Crankshaft gauges

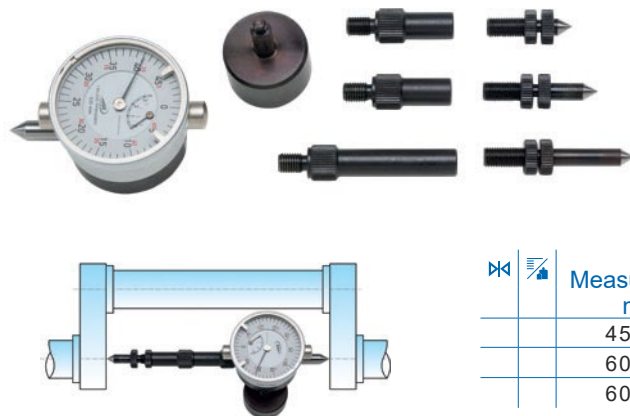

Model

- With dial gauge
- To be positioned between 2 crank arms
- Centre punch is not required
- Horizontal position of the dial gauge is assured with a plumb bob

Delivery

- Wooden case

Measuring range mm	Reading mm	Order no.
45 - 150	0.01	0735 101
60 - 300	0.01	0735 102
60 - 500	0.01	0735 103

0735 Replacement gauge for 0735

Model

- Without backplate



Order no.


For measuring range 45 - 150 mm

0735 901

For measuring range 60 - 300 / 60 - 500 mm

0735 902

0736 Length measuring instruments for external incisions

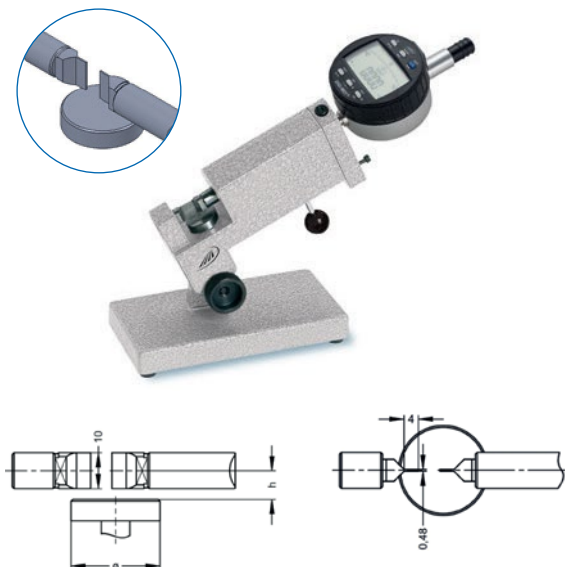

Model

- Ideal for serial measurements of incision diameters on turned parts
- Narrow measuring faces
- High precision ball guide of the transmission bolt
- Round support table, height adjustable, clamped for setting the exact measuring position
- Heavy stand
- Base unit in the angular grid 0° / 30° / 60° / 90°
- Titled and clamped
- Support for indicators with shaft Ø 8 mm
- Display devices: analogue and digital indicators

- Versions with other measuring inserts are available upon request

Delivery

- Cardboard box
- Without digital indicator (optional)

Measuring range mm	Size of table mm	Height h mm	Order no.
0 - 10	25	8	0736 101
0 - 25	38	13	0736 102
25 - 50	50	35	0736 103