



FaceSentry FaceSentry U402

ลงเวลางานด้วยสแกนใบหน้าและบัตร
แทนการใช้นิ้วหรือบัตรเพื่อลดการสัมผัสอุปกรณ์



Door Access Control



Camera



TCP/IP



RS-485

SProduct Introduction:


FaceSentry U402 is a high-performance, high-reliability face recognition product, relying on deep learning algorithms, with high recognition speed and high accuracy characteristics. Support face recognition 1:1 and 1:N mode, support IC card, NFC card and other verification methods.

Scenario:

Office areas, schools, neighborhoods, office buildings, hotels, shopping malls, shops, public service places and so on.

Product features:

- New wall-mounted industrial design with smooth lines
- 4-inch IPS full-view LCD display
- Identification accuracy 99.99% (99.77% of recognition pass rate at 1% error rate; 99.27% recognition pass rate at 0.1% error rate)¹
- Recognition speed less than 0.73 seconds
- Support for 5000 face photos
- Support for live detection
- Wi-Fi support
- Optional IC card, NFC card and other card reading functions

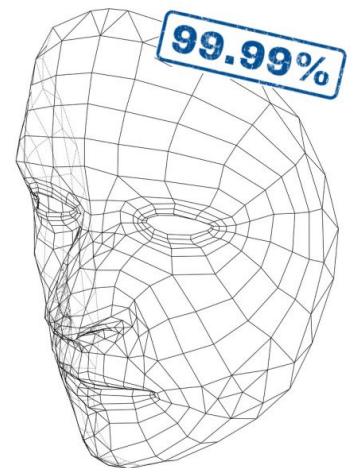



Specification:

model:FS-U402-IC

FS-U402-IC	
Display	
Display	3.97-inch IPS fullview LCD screen
Resolution	800 x 480
RGB Camera	
Image sensor	Progressive scan CMOS
Resolution	1600 x 1200
View Corner	51 degrees
Focal length	3.51 mm
Aperture	F2.8
White Balance	Support
Exposure	Support
Infrared camera	
Image sensor	Progressive scan CMOS
Resolution	1616 x 1232
Field of View Corner	51 degrees
Focal length	3.51 mm
Aperture	F2.8
White Balance	Support
Exposure	Support
Interface	
Serial Communication Interface	1 rd RS-232, 1rd road RS-485
Relay output	1 open signal output
Wigan Output	1 Luwegan 26/34
Reset interface	Reset pin button
Network Interface	1 way RJ45 100Mtainet
USB interface	1 Way Micro USB
Alarm Interface	2 alarm inputs
Tamper switch	Support
Function	



Specification:

model:FS-U402-IC

Face detection	Simultaneous detection and tracking of 5 people
Identify accuracy	99.99% (99.77% recognition pass rate at 1% error rate; 99.27% at 0.1% error rate)
Live detection	Support
Face capacity	5000 Face Photos
Stranger Detection	Support
Identify distance configurations	Support
UI interface configuration	Support
Remote upgrade	Support
How to deploy	Public network, local area network
System parameters	
Operating system	Android 8.1
CPU	8 core, 1.5GHz
GPU	Support
Storage capacity	Memory 1GB, storage 8GB
General parameters	
Power	DC 12 V/2A
Operating temperature	0 to 50 degrees C
Working humidity	10% to 90%
Power	Max. 15 W
Size of the device	185.24 mm x 90 mm x 21.2 mm



B.N.C.TOOLING Co.,Ltd.

BNCTOOLING.COM
BNCTOOLINGSHOP.COM

69/90 Hatairat Rd., Minburi ,Minburi Bangkok (Thailand) 10510

FaceSentry

Product size: model:FS-U402-IC

