



PRECIS REACTIVE TYPE VIBRATION TESTER

COPYRIGHT PROTECTED

**VS-5060M
VS-5060M-H**



The most economical two axis(horizontal & vertical) shaker.

- Having the optimal uniformity table, matching ISO 5344.
- Stepless angle vibration amplitude adjustment and predictable program.
- Show vibration displacement, acceleration, frequency and test time immediately on PC program.
- Capable of printing test report and provide unlimited data saving space.
- Low transverse motion and operation noise by advanced reactive principle theory.
- Signal generator include fixed frequency, sweep frequency and multi-random test function.
- No installation foundation needed.

Quality Policy

- Best Vibration Quality
- Precision in Equipment
- Scientific Management
- Technological Innovation





REACTIVE TYPE VIBRATION TESTER SPECIFICATION

Product Description

MODEL	VS-5060M-H	VS-5060M	VS-5060L	VS-5060LS
TableSize mm	500*600	500*600	500*600	500*600
Vibration Direction	Vertical + Horizontal	Vertical	Vertical	Vertical
Frequency Range Hz	5-100Hz (Vertical) 5-60Hz (Horizontal)	5-100	5-100	5-100
Frequency Accuracy Hz	+0.05Hz	+0.05Hz	+0.1Hz	+1Hz
Displacement Range (p-p) mm	0 - 2.8mm	0 - 2.8m	0 - 2.8m	0 - 2.8mm
AccelerationRange G	0-14G	0-14G	0-14G	0-14G
Max. Payload KG	150KG (Vertical) 400KG (Horizontal)	150	150	150
Test Mode	Fixed Sweep Multi-Random	Fixed Sweep Multi-Random	Fixed Sweep Multi-Random	Fixed Sweep
Display	PC - English Mandarin	PC - English Mandarin	PC - English Mandarin	LED Display




(Large Table)




(ESS)






(On Line Fixture)

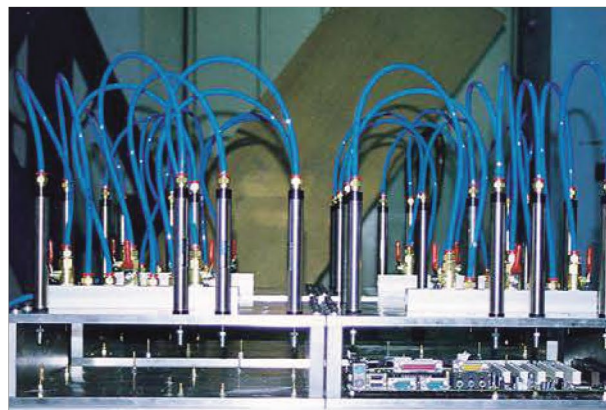



WINDOWS VERSION CONTROL PROGRAM PICTURES

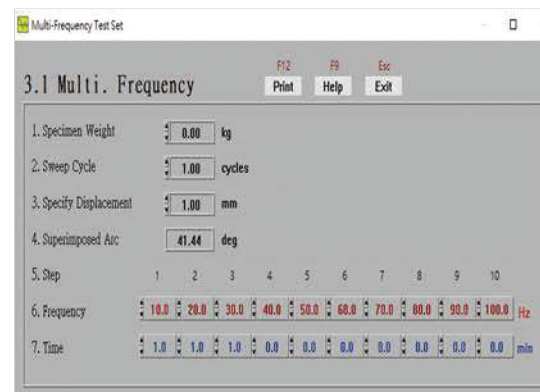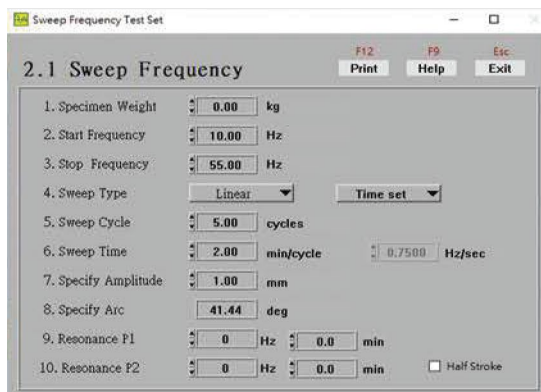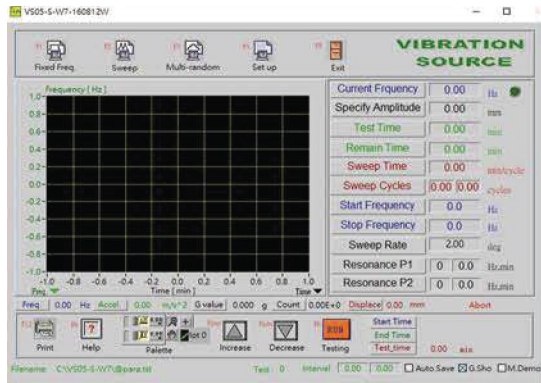

THE CAPACITY CHARACTERISTIC DIAGRAM OF TESTER

