





► Digital Caliper IP54

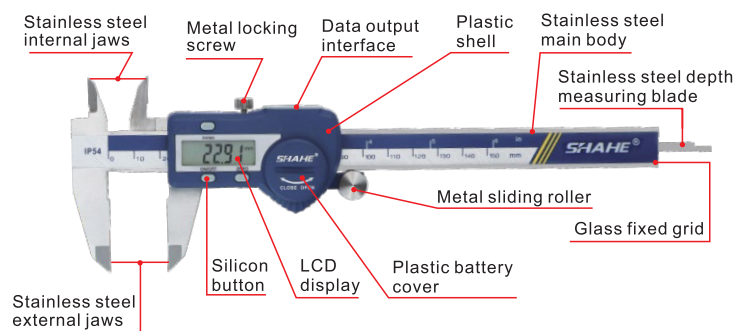

5110-150

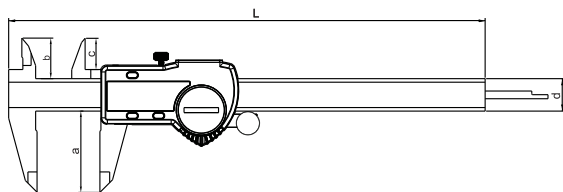

Technical Data

Model number	Measuring range (mm)	Resolution (mm/inch)	Accuracy (mm)	a (mm)	b (mm)	c (mm)	d (mm)	L (mm)
5110-150	0-150	0.01/0.0005"	± 0.02	40	20	15.5	16	235
5110-200	0-200	0.01/0.0005"	± 0.03	50	24	19.5	16	287
5110-300	0-300	0.01/0.0005"	± 0.04	60	26	21.5	16	390

► Digital Caliper IP54



5100-150

Technical Data

Model number	Measuring range (mm)	Resolution (mm/inch)	Accuracy (mm)	a (mm)	b (mm)	c (mm)	d (mm)	L (mm)
5100-150	0-150	0.01/0.0005"	± 0.02	40	20	15.5	16	235
5100-200	0-200	0.01/0.0005"	± 0.03	50	24	19.5	16	287
5100-300	0-300	0.01/0.0005"	± 0.04	60	26	21.5	16	390

Features

- Hardness stainless steel main scale and measuring jaws.
- Stable&reliable performance, accurate readout, no overspeed error.
- Much better glass fixed grid.
- Fine cutting edge and level & smooth depth groove.
- Top grade exquisite workmanship.

Model number	5110/5100
Type	Measurement for ID,OD,depth and step dimension
Capacitive grid transducer	Glass fixed grid
Protection	IP54
Display	LCD
Data Output	Yes
Max. response speed	3 meters/second
Battery	3V CR2032 (5110) lithium battery/3V CR1632 lithium battery(5100)
Battery Life	Approx. 1 year under normal use
Functions	On/Off, Zero-set, Inch/mm, Automatic Power On/Off, With lock screw